



## CDD630JDSL - Ductile Iron Kitemark Manhole Cover &amp; Frame


## KEY FEATURES

- BSI Kitemark certified to BS EN124 2015
- Double-seal design (manhole grease required to form seal, available separately, product code CD 285) for odour egress control
- Fitted with locking screws
- Integral keyholes



## CDD630JDSL - Specifications

|                                                  |                                                                                                                    |
|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Product Weight (Kg)                              | 94                                                                                                                 |
| Cover Weight (Kg)                                | 62                                                                                                                 |
| Clear Opening                                    | 600 x 600                                                                                                          |
| Overall Dimensions                               | 800 x 800                                                                                                          |
| Frame Depth                                      | 125                                                                                                                |
| Internal Tray Depth                              | 100                                                                                                                |
| Material                                         | Spheroid Graphite Iron Grade EN-GJS-500-7 to BS EN 1563:2011 Temporary Bitumen based paint coating to BS 3416:1993 |
| Load Rating                                      | D400                                                                                                               |
| Frame Pressure Bearing Area (N/mm <sup>2</sup> ) | 1.9                                                                                                                |
| Application                                      | Non carriageway use                                                                                                |

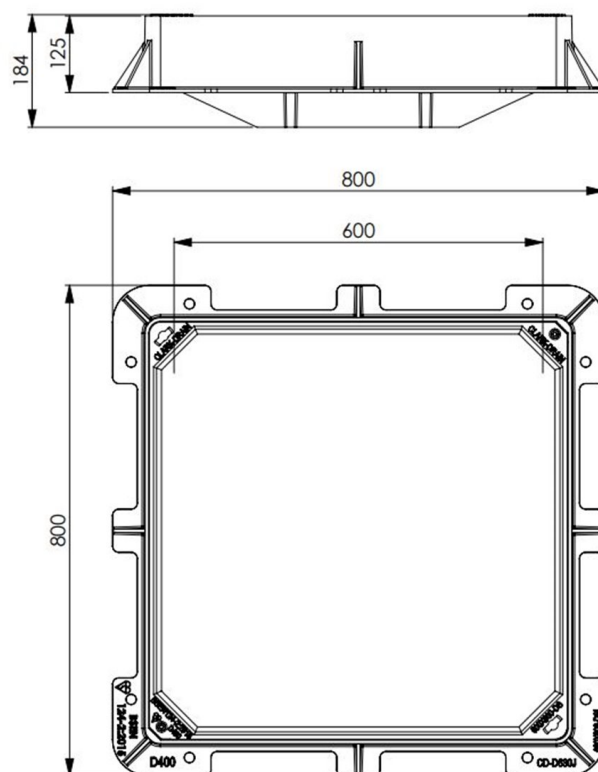

CDD630J-DSL/V0.1/14-06-2023

Due to our continuous product improvement program features and sizes may be subject to change without notice.

CLARK DRAIN, STATION ROAD, YAXLEY, PETERBOROUGH, PE7 3EQ, TEL. +44 (0) 1733 765317