



Armadillo SiltShield

Kit of 1 Armadillo SiltShield Bucket, 1 Armadillo SiltShield Bag, 1x Armadillo SiltShield Plate Inserts (2 parts)



CHARACTERISTIC	VALUE
Description	Kit of 1 Armadillo SiltShield Bucket, 1 Armadillo SiltShield Bag, 1x Armadillo SiltShield Plate Inserts (2 parts)

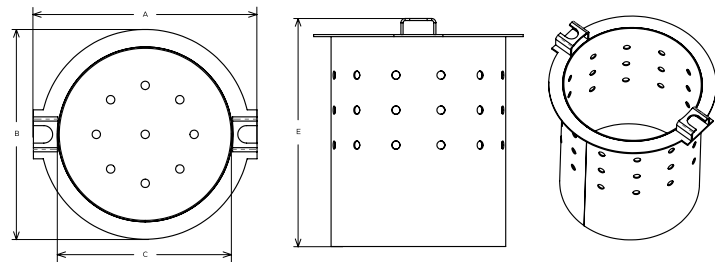

SPECIFICATION

GENERAL INFORMATION

Stock code	SILT/KITBOX/4545
------------	------------------

DIMENSIONS

Length	320mm
Width	320mm
Quantity	1
Height	326mm
Maximum volume in litres	13.93 L

NOTES

- ▶ Internal volume of bucket: 13,926.04 cm³.
- ▶ Maintenance frequency: Will depend on silt accumulation, empty when nearly full.
- ▶ Armadillo SiltShield has been designed and manufactured in accordance with the relevant requirements of BS EN 124-2:2015, Clause 6.9, which states "Where dirt pans or dirt buckets are specified, they shall be designed to ensure that drainage and ventilation can continue when the dirt pan or bucket is full". The SiltShield system fully conforms to this requirement. Its design allows continuous water flow and air movement through the gully even when the filter element contains silt or debris. This ensures ongoing drainage performance and ventilation, reducing the risk of blockage or surface flooding while maintaining environmental protection during construction and operation.

FULL PALLET QUANTITIES

- ▶ Armadillo SiltShield is available in full pallet quantities, with 25 per pallet. Use stock code

SILT/SHLD/4545 to order. For more information call info@wrekinproducts.com.
01543 440 440 or or email

- ▶ All information provided is subject to change without notice. While every effort is made to ensure accuracy and relevance, Wrekin Products Ltd. does not warrant the completeness or reliability of the information contained herein. Photographs, illustrations, and other visual materials are provided for illustrative purposes only.
- ▶ Wrekin Products Ltd. reserves the right to make design amendments or improvements to any product at any time, where such changes enhance performance or durability, without affecting compliance with the stated standards.
- ▶ Where errors or omissions are identified, amendments will be made as quickly as possible.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ All values stated are nominal within 2.5% tolerance.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Wrekin products are supplied subject to our [terms and conditions of sale](#).
- ▶ If you require further technical details beyond those available on this datasheet, please [contact us](#).